


Trailer LED Screen

Mobile led screen
Trailer 3.9 / 4.8

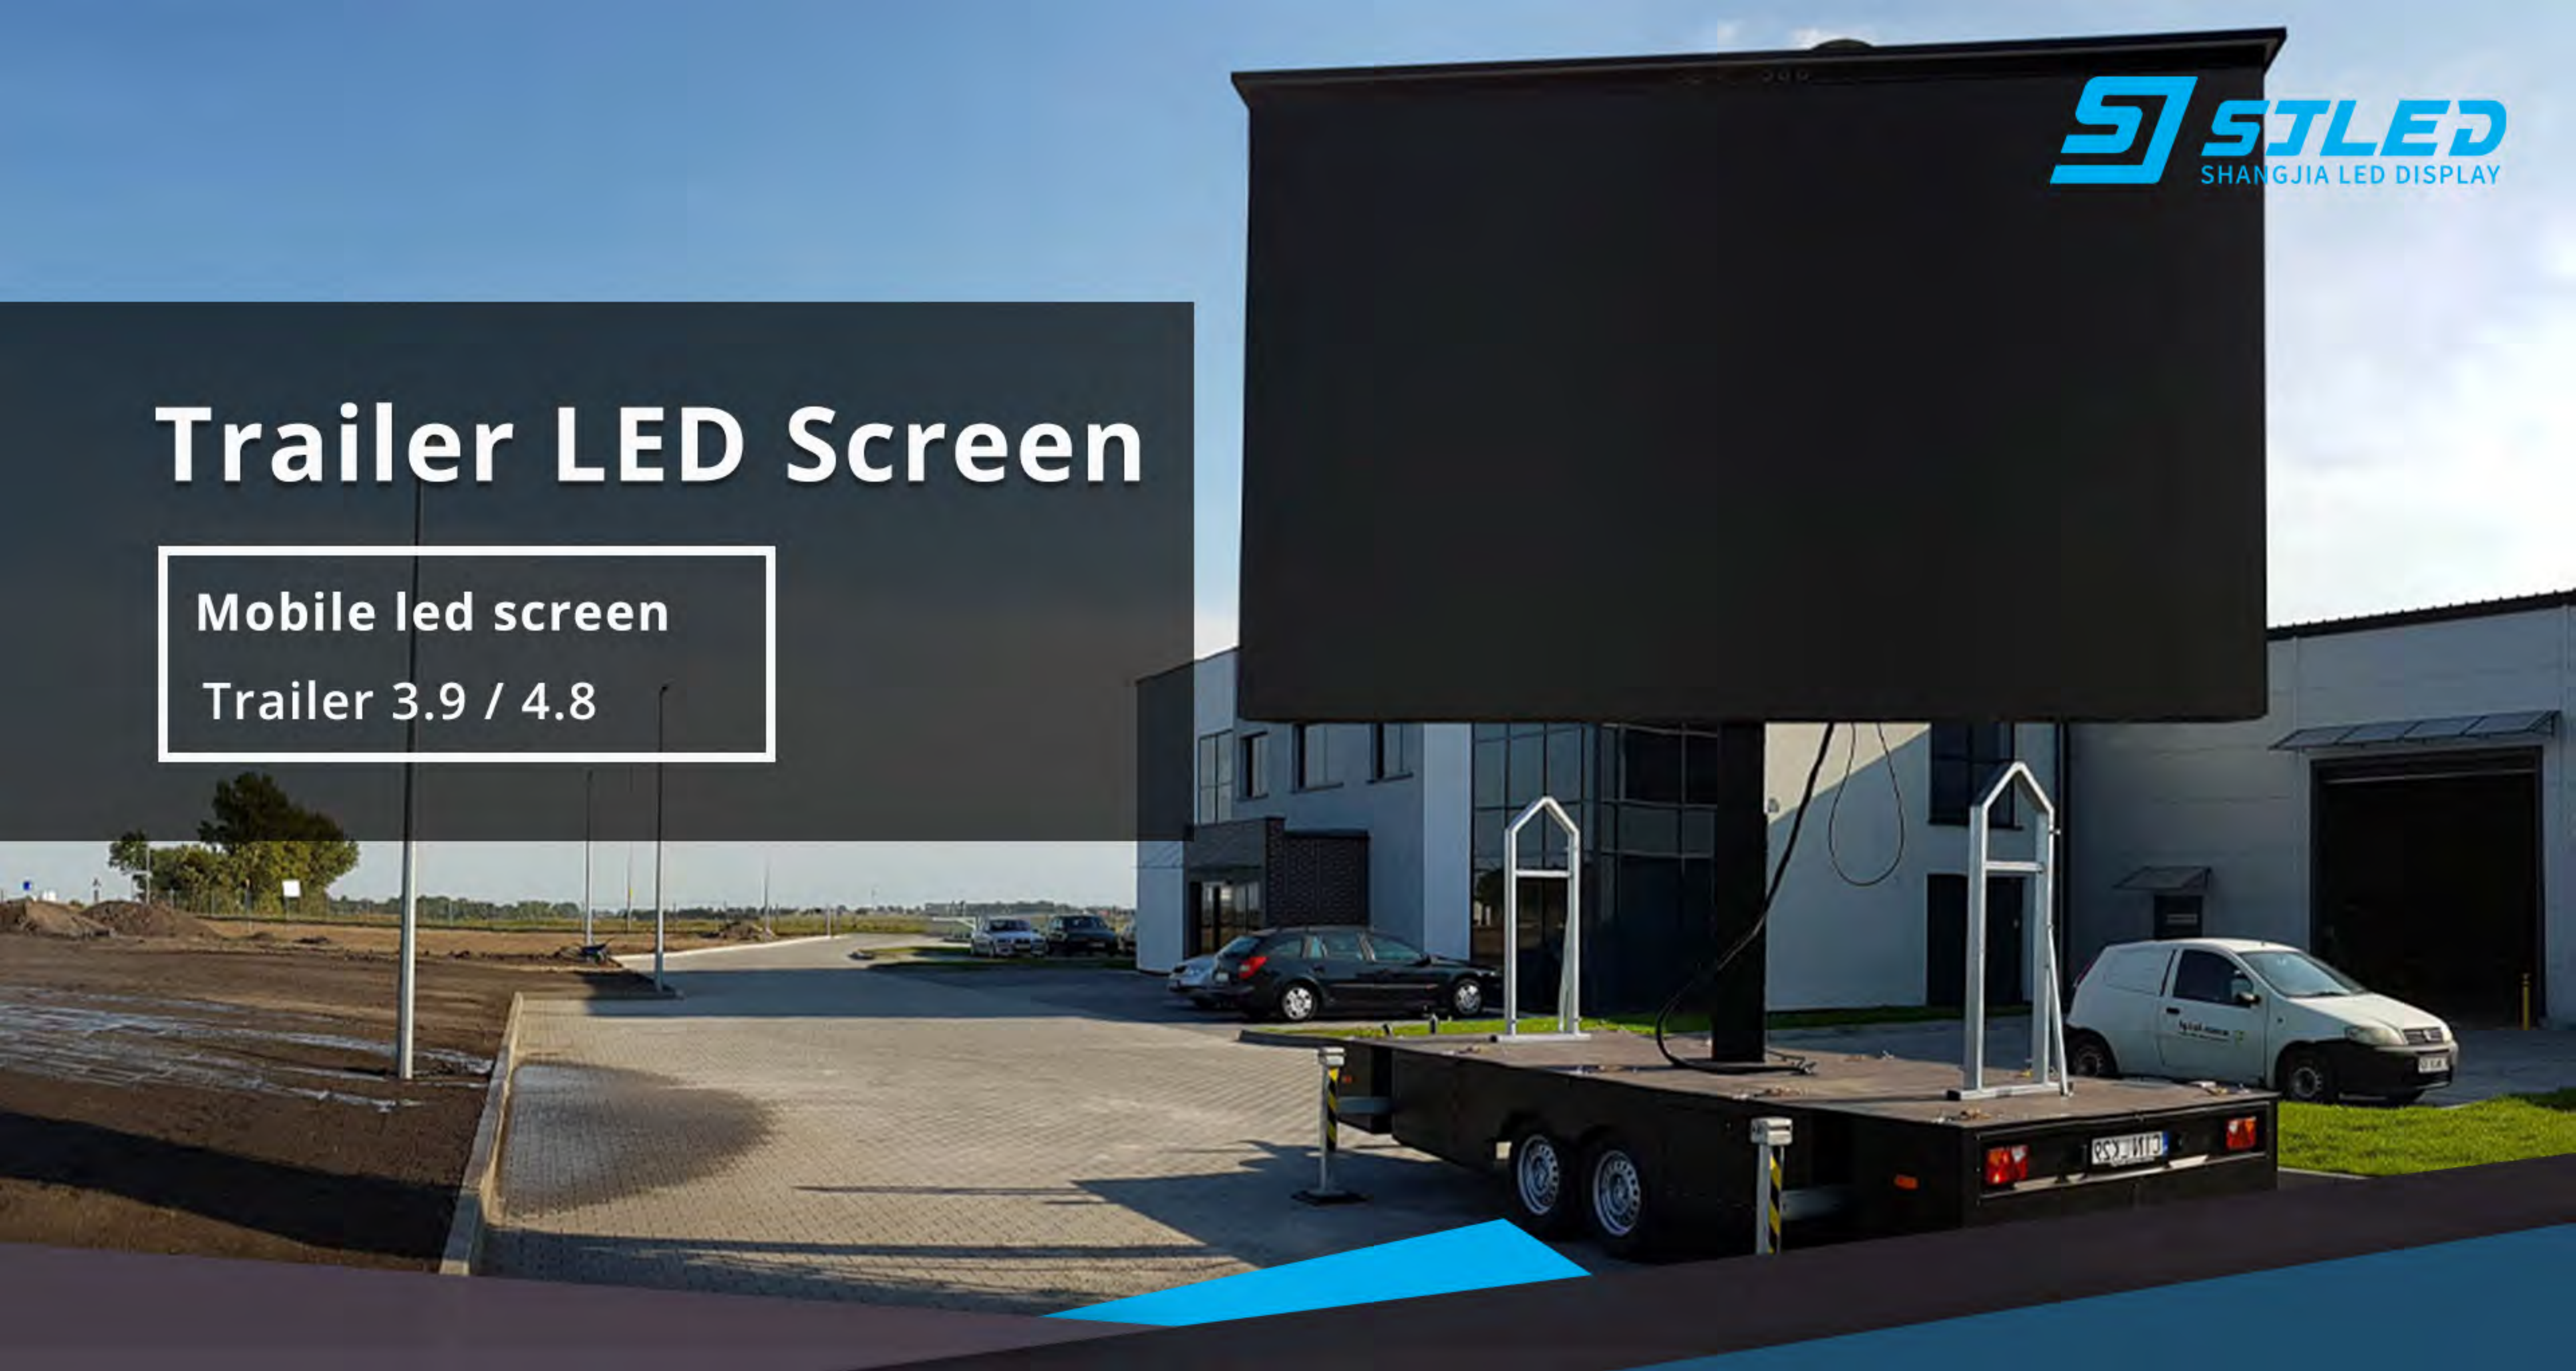

Trailer LED 3.9 / 4.8


- ✓ Remote Control Management
- ✓ Hydraulic mast
- ✓ Live Broadcast
- ✓ Power generator



WiFi Control Hydraulic mast Live Broadcast Power generator

	P3.9	P4.8
Pixel pitch	3.9mm	4.8mm
LED chips	SMD 3IN1 1R1G1B	SMD 3IN1 1R1G1B
Driving method	1/16	1/13
Physical Density	65536 dots/m ²	43222 dots/m ²
Cabinet size	500*500*80mm	500*500*80mm
Weight of cabinet	7.5 kg	7.5 kg
Max. consumption	500 W/m ²	500 W/m ²
Ave. consumption	300 W/m ²	300 W/m ²
Brightness	≥4500 nit	≥4500 nit
Refresh rate	≥3840Hz	≥3840Hz
IP Level	IP 65	IP 65

PRODUCT FEATURES

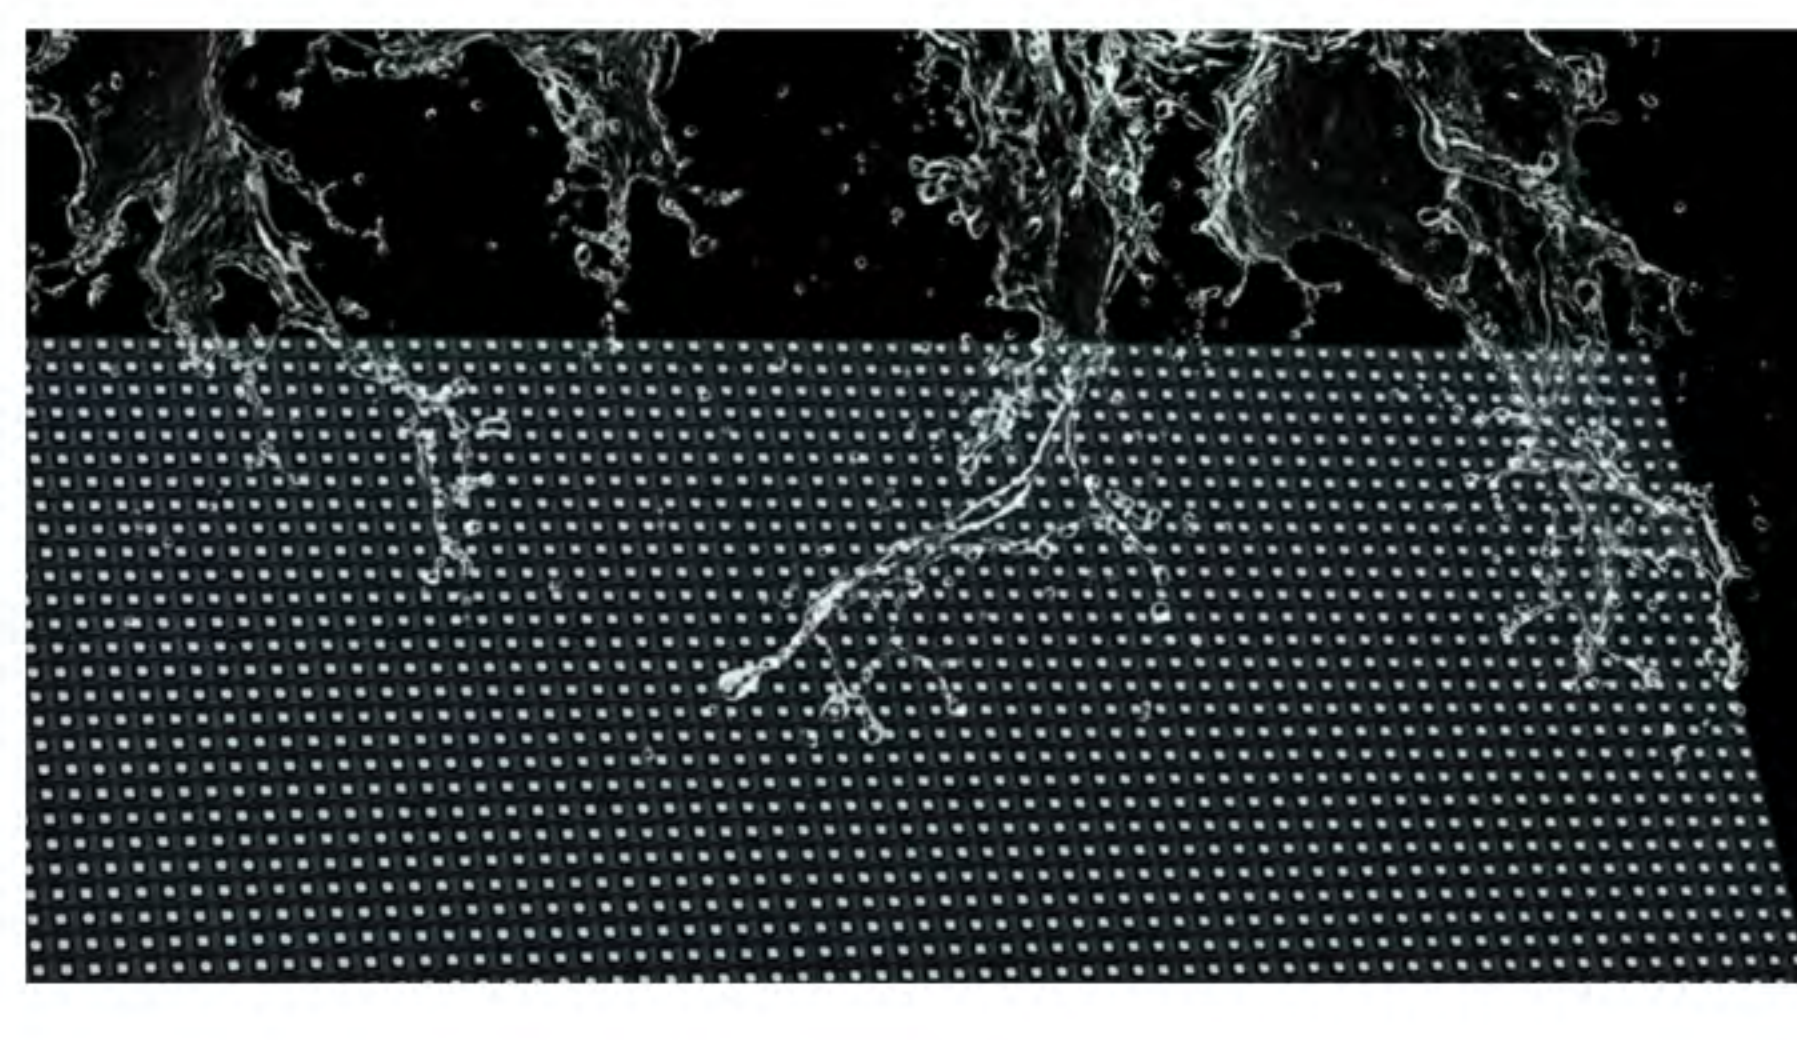


POWER GENERATOR

TrailerLED can be equipped with a power generator so no external power is required.

HIGH PROTECTION LEVEL

Rear access led cabinets with screws fixed led modules; Automotive grade waterproof rubber ring makes the cabinets double protected

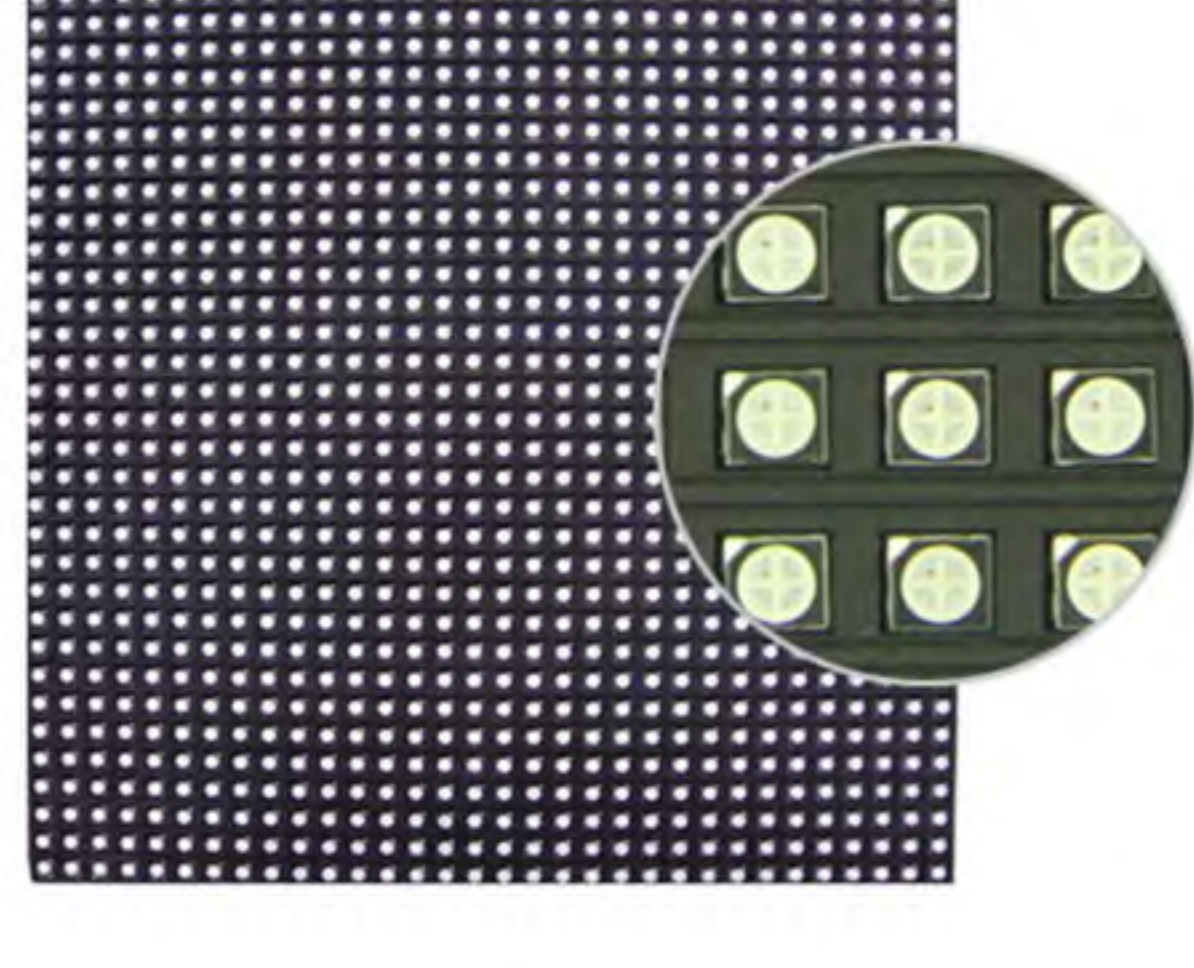

HIGH BRIGHTNESS


Using high-brightness outdoor power supplies, the display can compete with direct sunlight exposure at peak times of the day.

LIVE BROADCAST

TrailerLED can be equip with an image scaler to render real time footage directly to the screen for live streaming. (optional)


How to control LED display?

By computer, wifi, 4G, usb, remote, internet, mobile, pad, etc. Yes, you can control in your convenient management. Many screens together? No problem, your laptop can manage all of them whenever and wherever.

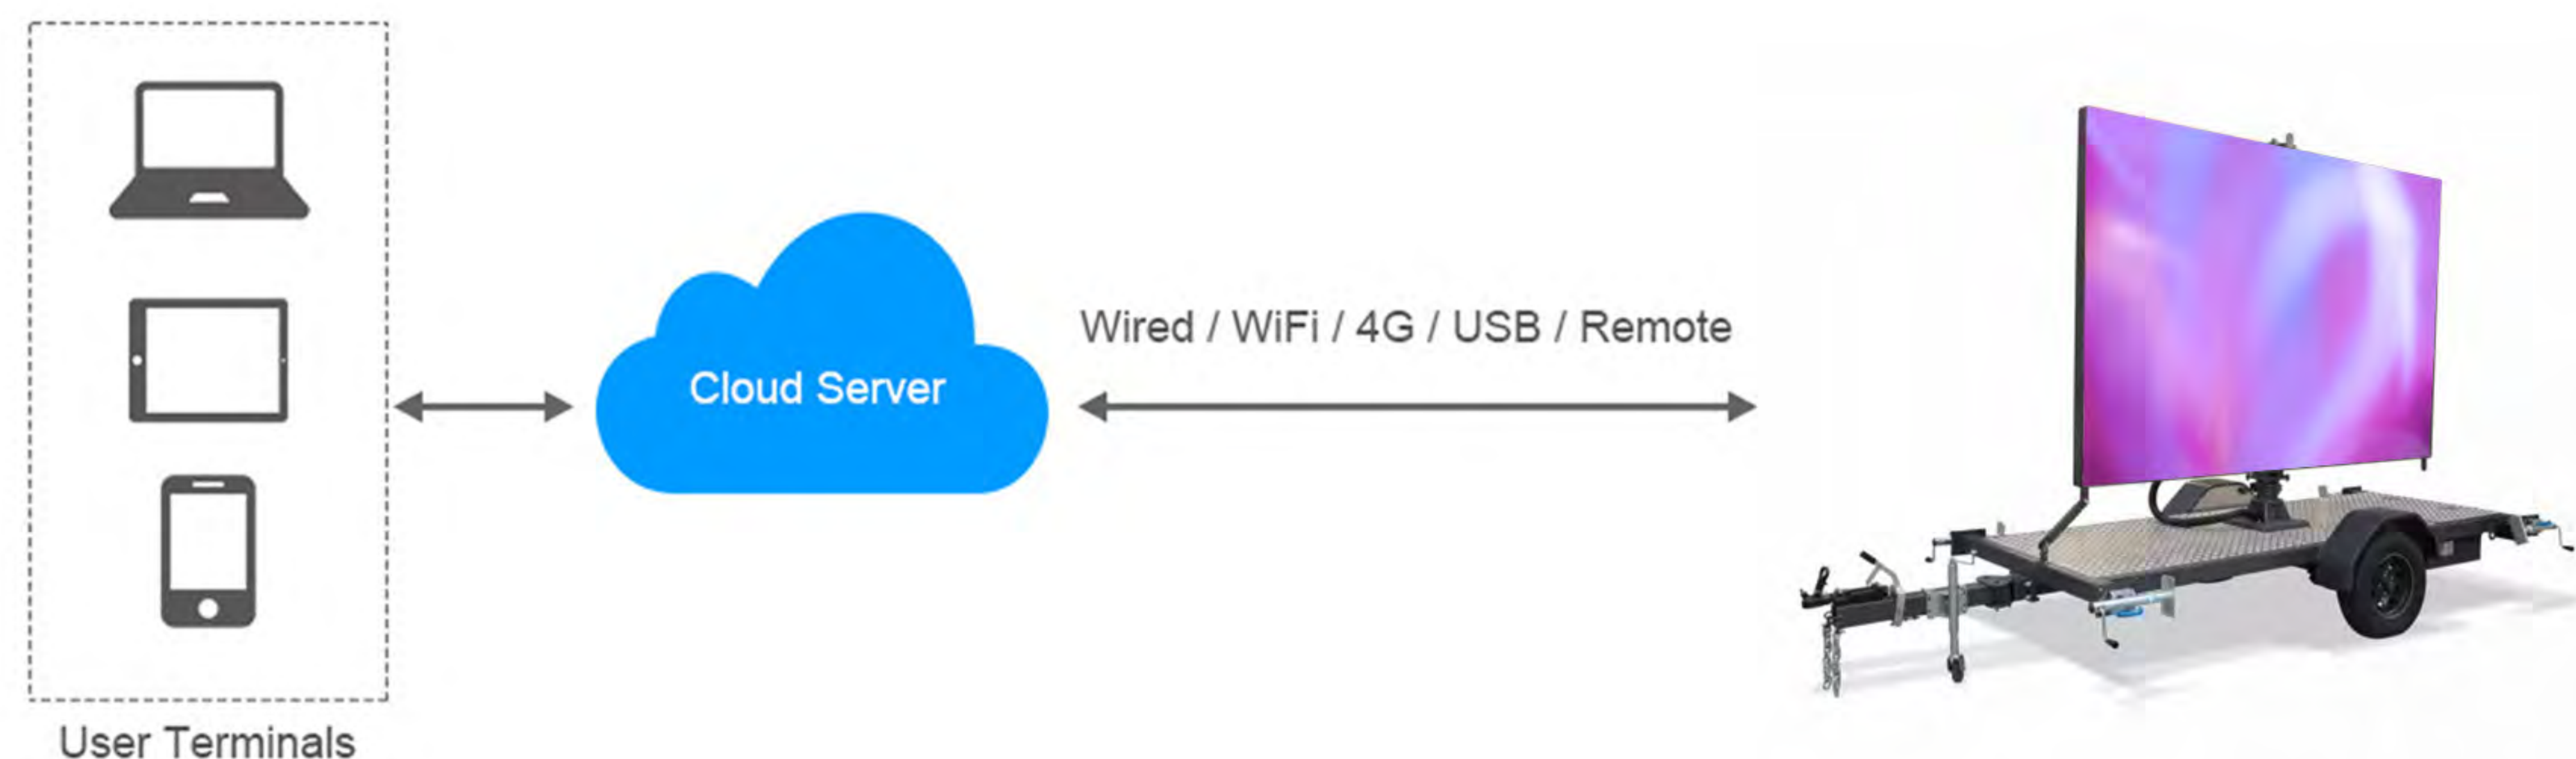

Ultra High / Low Temperature

Trailer series design for working in all weather outdoor environments. High protection grade of IP65 suitable for winter and cold areas like North European countries and Russia, and high temperature like KSA, Oman, UAE, etc.

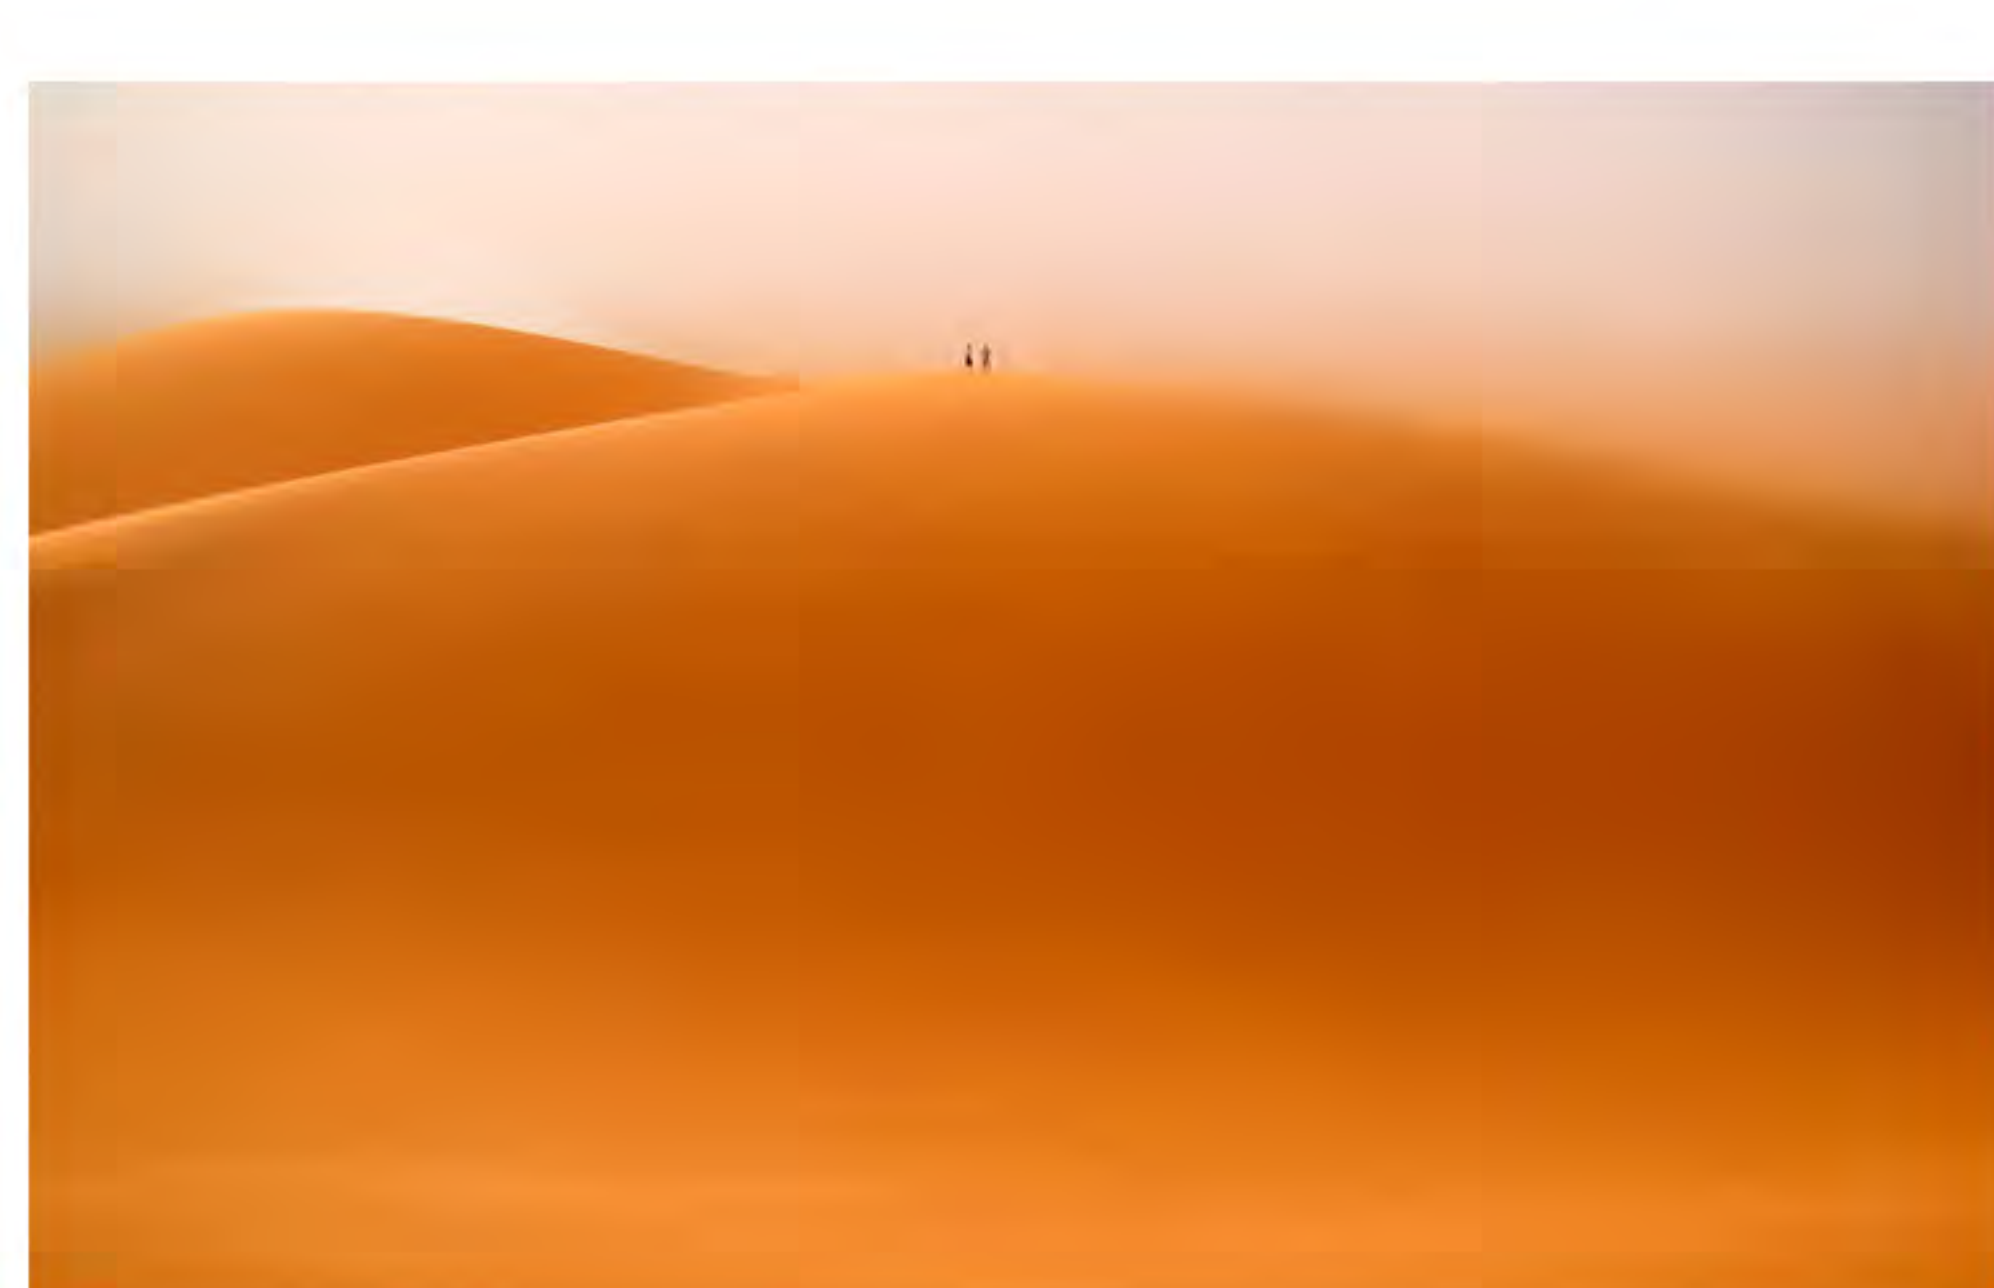

High temperature



Low temperature

APPLICATION

